

S3-X

Convertible Controller/Reader




Main Features:

- Waterproof, conforms to IP66
- One relay, 1000 users
- Access modes: Card, PIN, Card + PIN, Multi Cards
- Card type: 125KHz EM & Hid card, PIN length: 4~6 digits
- Wiegand 26~37 bits input & output
- User data can be transferred by Wiegand line
- Pulse mode, toggle mode
- 2pcs device support interlock for two doors

Unique Features:

1. Convertible working mode

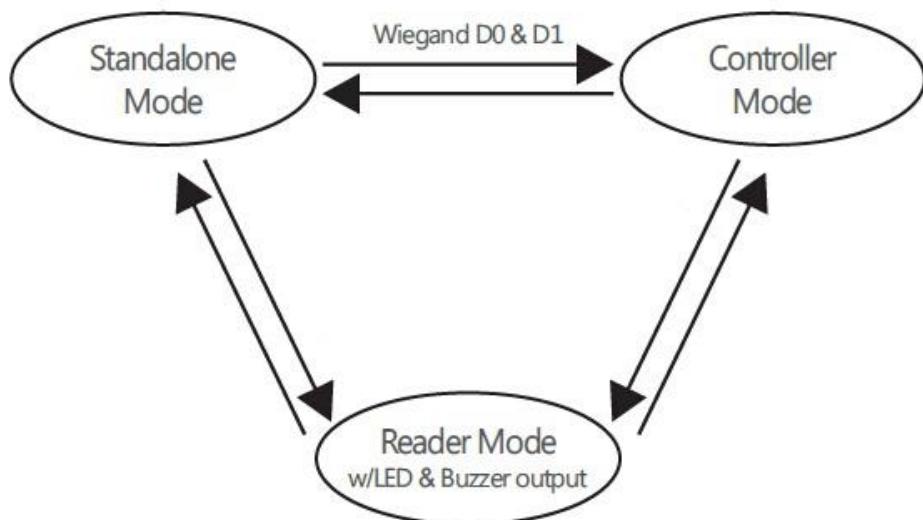

2. User Data Transfer



Notes:

1. The Master Units and Accept Units must be S1/2/3/4-X or Sboard.
2. Maximum 10pcs Accepts Units can be transferred once.
3. For full 1000 users enrolled, the transfer takes 3 minutes.